-INSTALLATION INSTRUCTIONS-
33" X 22" SELF RIMMING DOUBLE BOWL KITCHEN SINK
"GENUINE" PORCELAIN-ON-STEEL

A WORD OF CAUTION: REMOVE PRODUCT FROM CARTON BEFORE CUTTING TEMPLATE. THIS NEW FIXTURE HAS A DURABLE FINISH; HOWEVER, EXTRA CARE SHOULD BE EXERCISED DURING INSTALLATION WHEN ROUGH HANDLING AND THE DANGER OF DROPPED TOOLS MAY CAUSE DAMAGE.

1. CHECK THE FIXTURE THOROUGHLY FOR DAMAGE. REPORT ANY APPARENT DAMAGE TO THE DISTRIBUTOR THAT FURNISHED THE FIXTURE AND REQUEST THEIR ADVICE ON CONTINUING WITH THE INSTALLATION.

2. IF THIS IS A NEW INSTALLATION, CUT THE (32"X 21") TEMPLATE OUT OF THE CARTON, PLACE IT ON THE COUNTER TOP AND MARK AROUND IT WITH A PENCIL TO SHOW WHERE THE HOLE SHOULD BE CUT.

3. USE A SABER SAW OR KEYHOLE SAW TO CUT THE COUNTER TOP.

4. IF THIS IS A REPLACEMENT SINK, SHUT OFF THE WATER SUPPLY AND DISCONNECT THE FAUCET SUPPLY FITTINGS.

5. LOOSEN BOLTS HOLDING THE SINK IN THE COUNTER. YOU MAY NEED TO REMOVE THE SEALANT WITH A PUTTY KNIFE. LIFT THE SINK OUT OF THE COUNTER.

6. MOUNT THE FAUCET AND DRAIN ONTO THE SELF-RIMMING KITCHEN SINK.

7. PICK UP THE FIXTURE AND SET IT INTO THE COUNTER TOP. BE SURE TO SQUARE THE FIXTURE WITH THE FRONT OF THE COUNTER TOP.

8. POSITION CLIPS AS NEEDED (TYP. 2 PER SIDE). TIGHTEN UNTIL SNUG.

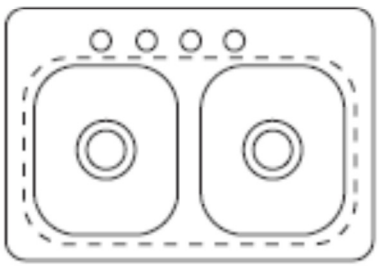

BOTTOM VIEW

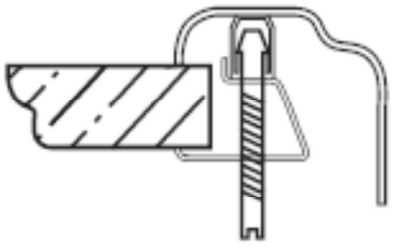

NOTE: BE CAREFUL NOT TO OVER-TIGHTEN, AS THIS COULD RESULT IN DAMAGE TO THE PORCELAIN FINISH.

9. CONNECT THE FAUCET SUPPLY AND DRAIN FITTINGS.